теплобак®

Heat accumulator «tank in tank»

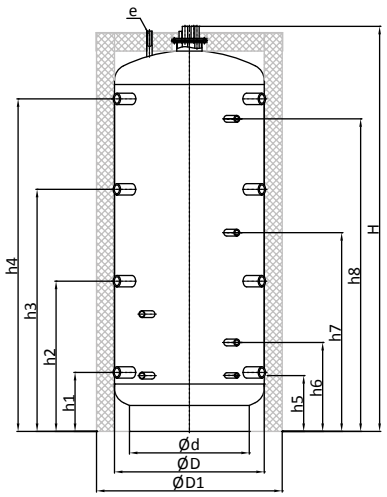

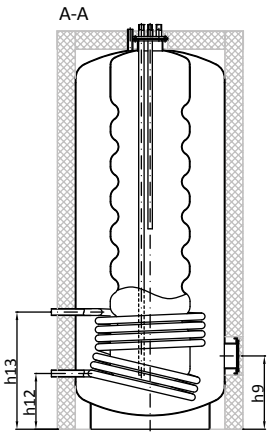

750-2000 l
Volume

3 bar 95°C
Max working pressure

6 bar 95°C
Working pressure of inner tank

6 bar 95°C
Working pressure of heating circuit





VTA/N-1-SOLAR PLUS

h1-h4 ..... Fitting pipes for delivery and return lines of heating circuits
h5 ..... Technologic fitting pipe
h6-h8 ..... Fitting pipes for temperature sensors
h9 ..... Flange Ø 120mm
h12-h13 ..... Fitting pipes for delivery and return lines of outer heating circuit (TO1-lower heat exchanger)
e ..... Air duct
a ..... Cold water inlet
b ..... Hot water inlet
c ..... Recirculation line
t ..... Fitting pipe for temperature sensor

V_{tank}, l	$V_{inn/tank}$, l	Overall dimensions, mm				S_{TO1}, M^2	V_{TO1}, л	Fixing dimensions, mm											e	a, b	c	t
		H	ØD1	ØD	Ød			h1	h2	h3	h4	h5	h6	h7	h8	h9	h12	h13				
750	200	2030	950	750	450	1,5	10	295	752	1212	1665	280	445	995	1565	367	279	631	½"	¾"	½"	½"
								1½"				½"		¾"			1¼"					
1000	200	2080	1050	850	450	1,8	14	323	780	1240	1693	308	473	1023	1593	395	311	661	½"	¾"	½"	½"
	330							1½"				½"		¾"			1¼"			1"	¾"	
1500	200	2170	1200	1000	450	2,3	18	368	825	1285	1738	353	518	1068	1638	440	356	706	½"	¾"	½"	½"
	330																			1"	¾"	
	480							1½"				½"		¾"			1¼"					
2000	200	2270	1400	1200	450	2,3	18	419	876	1336	1789	404	569	1119	1689	491	407	707	½"	¾"	½"	½"
	330							1½"				½"		¾"			1¼"			1"	¾"	