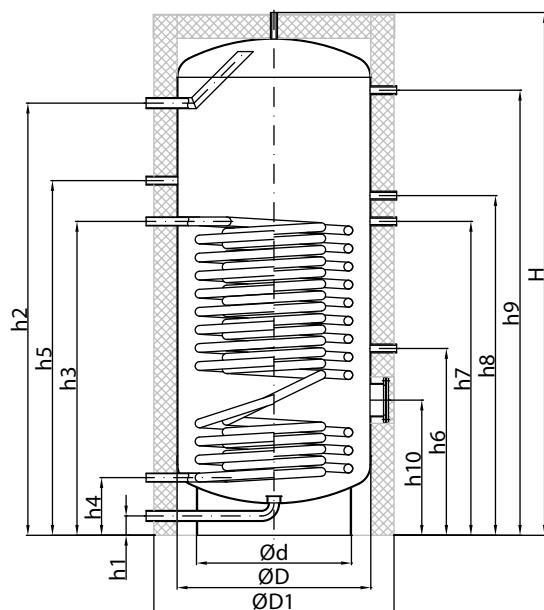


400-
1500 l

Volumes

6 bar
95°C

Working pressure
tank

10 bar
95°C

Working pressure in
heat exchanger



VTN-2-PLUS

- H Hot water
- h1 Cold water, drainage
- h4 Hot water outlet
- h5-h6 Pipes supply and return (TO1-lower heat exchanger)
- h9 Recirculation
- h10-h13 Connecting the control-adjusting and measuring fixtures
- h14 Flange, Ø115mm

V _{tank} , l	Dimensions, mm				S _{TO1} , m ²	V _{TO1} , l	Mounting dimensions, mm									
	H	ØD1	ØD	Ød			h1	h4	h5	h6	h9	h10	h11	h12	h13	h14
400	1705	800	600	450	3,85	28	75	1381	1173	181	1281	631	1156	-	1431	481
	½"						1"				¾"					
500	1955	800	600	450	4,10	30	75	1631	1217	181	1331	681	1217	1317	1681	481
	½"						1"				¾"					
750	2025	950	750	600	4,94	33	75	1673	1215	223	1373	723	1215	1315	1723	523
	½"						1¼"		1¼"		1"	¾"				
1000	2060	1050	850	700	5,10	47	75	1690	1140	240	1390	740	1140	1240	1740	540
	½"						1¼"				1"	¾"				
1500	2200	1200	1000	850	6,35	59	75	1771	1171	321	1471	821	1171	1271	1821	621
	½"						1½"		1¼"			¾"				